


Black Bruin BBR H rotator

BBR H rotator is the top choice for heavy duty harvesting, when productivity, strength and endurance are required. Unique and wear-proof multi-disc brake guarantees smooth harvesting by damping the head swing. BBR H stands for reliability and suitability for all harvester head applications.




Proven in harvester head applications.

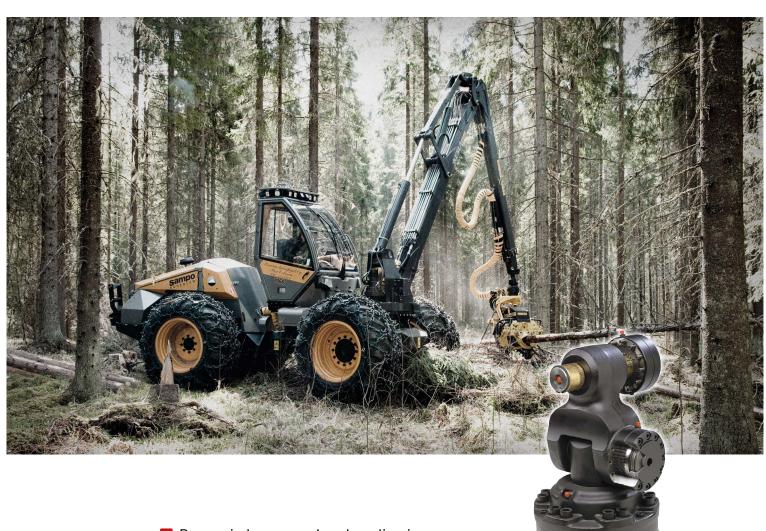



Features and benefits

- excellent load capacity in radial and axial direction
- constant high torque throughout the turning range
- built-in double-acting pressure relief valve
- one or two adjustable and easy-to-service swing dampers (standard/x-tra heavy/hydraulic options)
- all-season sealing

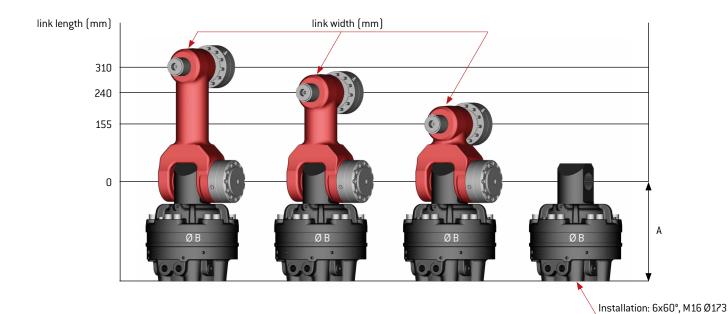

MODEL	PART NUMBER	BRAKE OPTIONS			LINK LENGTH	LINK WIDTH	A	В	MAX. WORKING PRESSURE	MAX. TORQUE	MAX. AXIAL LOAD 3)	INLETS	WEIGHT	
		Std. 1)	X-tra heavy 1)	Hydraulic ²⁾	(mm)	(mm)	(mm)	(mm)	(bar/MPa)	(Nm)	(kN)	INLEIS	(kg)	
BBR 08H	277 035 4104 277 035 4204 277 035 4304 277 035 4604 277 035 4704	- 2 1 1 2	N/A	Available	_ 240 " "	- 100 100 80 80	260	236	250/25	1 600	80 √8t ∱(4t)	R1/2"	46,5 - 72	12-08-17
BBR 15H	277 040 4108 277 040 4008 277 040 4208 277 040 4408 277 040 4908	- 2 2 2 1	Available	Available	- 155 240 310 155	_ 100 " "	269,5	252	250 / 25	3 000	150 ▼ 15 t ↑ (6,5 t)	R1/2"	57 - 88	ochure_EN_500_201
BBR 16H	277 045 4108 277 045 4208 277 045 4308	- 2 1	Available	Available	_ 240 "	- 100 "	291	252	250 / 25	3 000	160	R1/2"	64,5 - 94	bb_BBR_H_br

^{1]} spring operated brake, 2) pressure operated brake, 3] dynamic loading values 50 % of max. For additional models and options, please contact the manufacturer.

